HOW TO INSTALL A HILETTERS SIGN

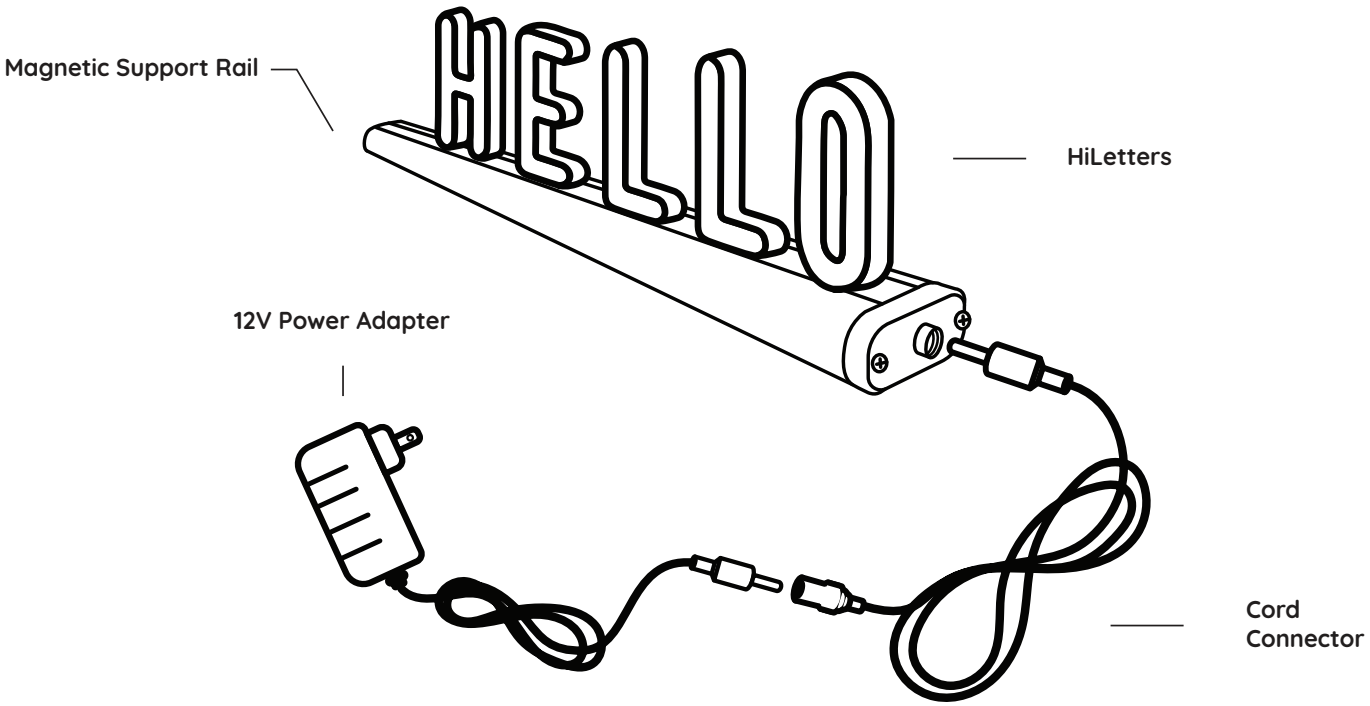

SAFETY INSTRUCTIONS

Please carefully study the instruction manual and information below before installing or using this product. Please keep this user manual for further reference.

1. This LED neon sign is intended for indoor application only. Do not use in damp or wet locations. Do not install it in an area that will exceed 120°F (49°C).

2. This LED neon sign works only with low voltage 12V DC. Please always use the attached power adapter to power up the sign. Do not connect the sign directly to the line voltage. If in any doubt, please consult a local electrician.

3. Disconnect power before handling or cleaning. Maintenance of the luminaires is limited to their surfaces. During maintenance, no moisture can come into contact with any areas of the terminal connections or voltage control parts.

4. Clean with a soft, dry cloth. Do not use solvents or chemicals. Avoid dampness on all electrical components.

WWW.HINEON.COM

For indoor use only. Avoid direct contact with water.

The light is designed to work only with the indicated voltage. Different items require different working voltages.

This electric sign is built in compliance with UL requirements and standards.

This luminaire cannot be disposed of with regular domestic waste in a standard rubbish can. You have to bring it to a staging area for electrical waste.

INSTALLATION

1

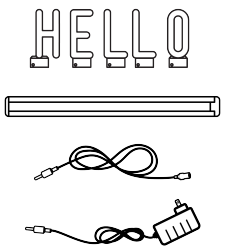

Prepare your HiLetters Neon Set (HiLetters, magnetic support rail, cord connector, and 12V power adaptor)

2

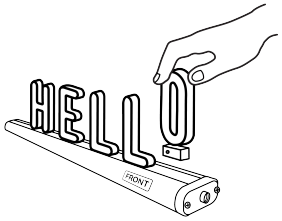

Arrange your magnetic LED letters to your desired message onto the rail facing front. The front side is marked with a sticker.

3

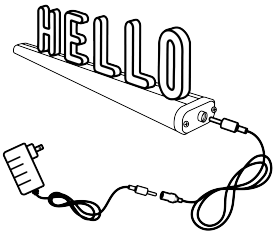

Plug in the neon wire and connect the cord connector to the 12V power adaptor.

*OPTIONAL WALL INSTALLATION

4

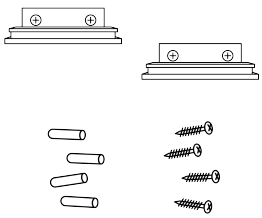

Get your wall installation accessories (screws, nail anchors, and wall mounts).

5



Pencil mark the screw hole locations and drill onto the marked locations.

6

Take the drywall anchors and tap them into the holes using a hammer.

7



Now align the holes of your wall mounts and the nails into the drywall anchors.

8

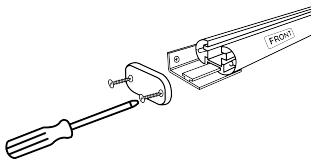

Unscrew the left cap of the rails and slide the wall mount in. Then screw the cap back in place.

9

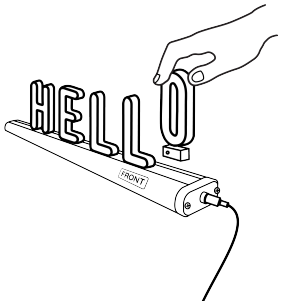

Now you can arrange your HiLetters on the rail facing front. You can remove the sticker once done.

10



Connect the wires to the rail and you're ready to light up your neon sign.

NEED MORE ASSISTANCE?

Call: +1 833 768 7999

Email : hello@hineon.com

Visit: www.hineon.com/faq/

SCAN TO VISIT FAQ PAGE