HOW TO CONNECT A HIPATTERN NEON SIGN

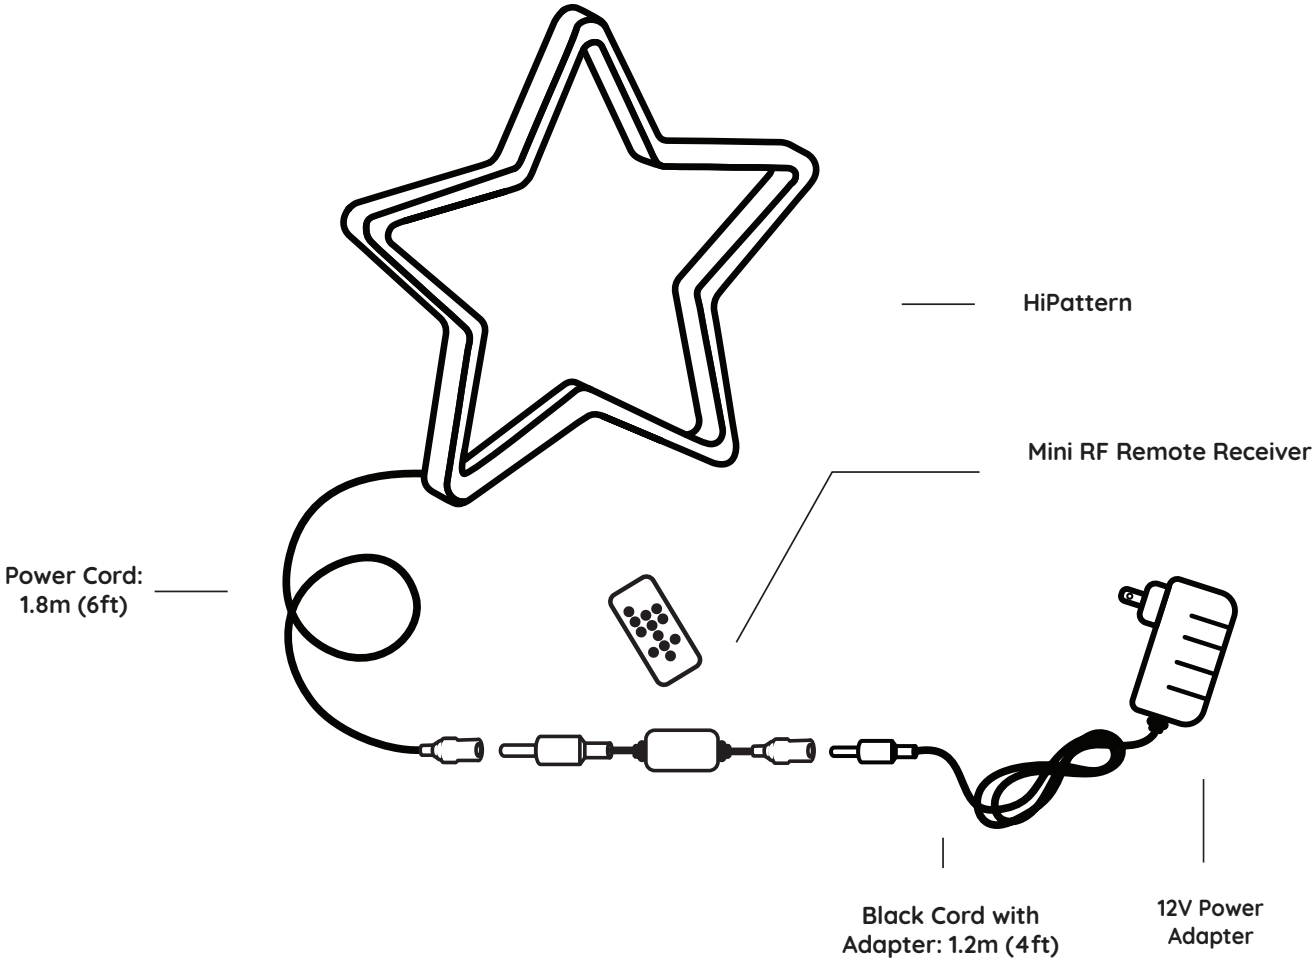

SAFETY INSTRUCTIONS

Please carefully study the instruction manual and information below before installing or using this product. Please keep this user manual for further reference.

1. This LED neon sign is intended for indoor application only. Do not use in damp or wet locations. Do not install it in an area that will exceed 120°F (49°C).

2. This LED neon sign works only with low voltage 12V DC. Please always use the attached power adapter to power up the sign. Do not connect the sign directly to the line voltage. If in any doubt, please consult a local electrician.

3. Disconnect power before handling or cleaning. Maintenance of the luminaires is limited to their surfaces. During maintenance, no moisture can come into contact with any areas of the terminal connections or voltage control parts.

4. Clean with a soft, dry cloth. Do not use solvents or chemicals. Avoid dampness on all electrical components.

WWW.HINEON.COM

For indoor use only. Avoid direct contact with water.

The light is designed to work only with the indicated voltage. Different items require different working voltages.

This electric sign is built in compliance with UL requirements and standards.

This luminaire cannot be disposed of with regular domestic waste in a standard rubbish can. You have to bring it to a staging area for electrical waste.

INSTALLATION

1

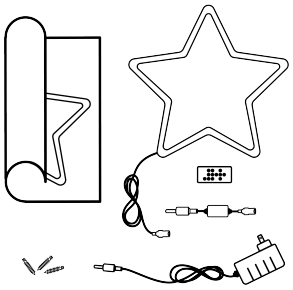

Prepare your HiPattern Set

(HiPattern, Cord Connector, 12V Power Adaptor, Direct-to-Wall Nails, Blueprint, optional: Dimmer Switch/RF Controller)

2

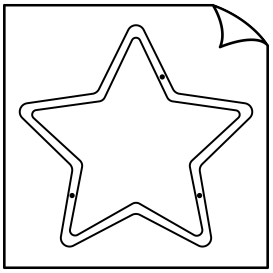

Find an area to put your sign, get your blue print and tape it on the wall. Identify the areas where the plastic nails would be attached.

3

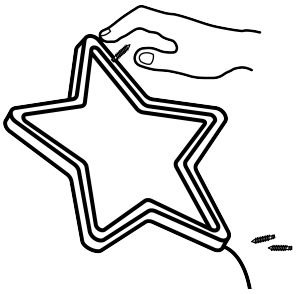

Screw the plastic nails onto the back of your HiPattern neon sign.

4

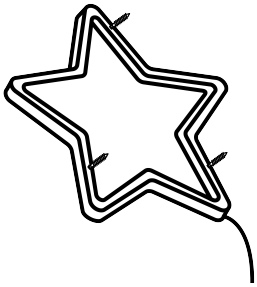

Screw the rest of the nails provided based on your blueprint.

5

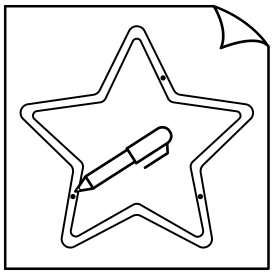

Using your pen, mark the black spots with and make a hole through it until it marks the wall.

6



Remove the blueprint and drill a hole through the markings with a ¼" (6mm) drill bit

7

Align the nails to the drilled holes, apply some pressure and push your sign to the wall.

8

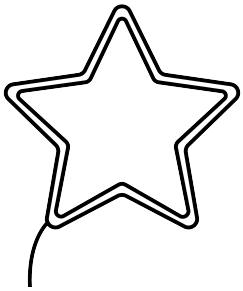

Finally, fix the wiring based on our guide, plug in the power adapter, and light it up.

NEED MORE ASSISTANCE?

Call: +1 833 768 7999

Email : hello@hineon.com

Visit: www.hineon.com/faq/

SCAN TO VISIT FAQ PAGE