HOW TO CONNECT AN INDOOR OPEN NEON SIGN

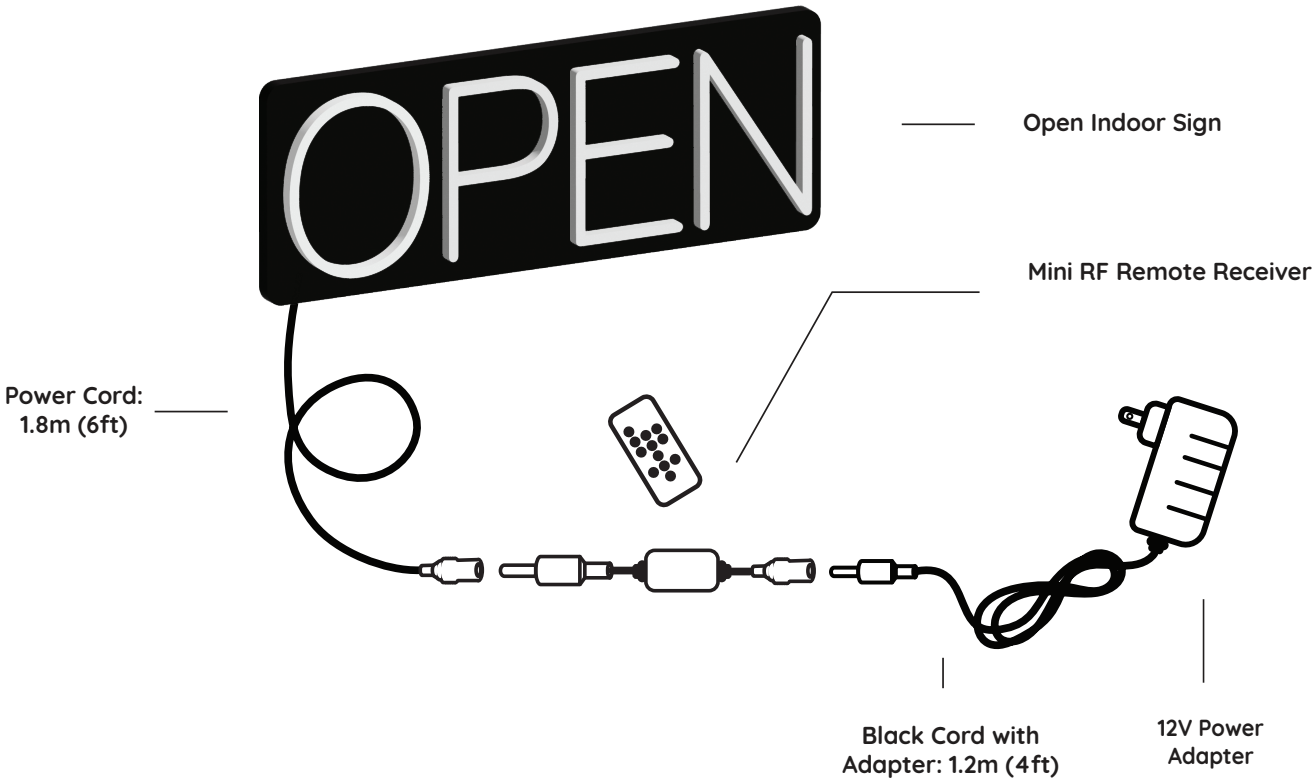

SAFETY INSTRUCTIONS

Please carefully study the instruction manual and information below before installing or using this product. Please keep this user manual for further reference.

1. This LED neon sign is intended for indoor application only. Do not use in damp or wet locations. Do not install it in an area that will exceed 120°F (49°C).

2. This LED neon sign works only with low voltage 12V DC. Please always use the attached power adapter to power up the sign. Do not connect the sign directly to the line voltage. If in any doubt, please consult a local electrician.

3. Disconnect power before handling or cleaning. Maintenance of the luminaires is limited to their surfaces. During maintenance, no moisture can come into contact with any areas of the terminal connections or voltage control parts.

4. Clean with a soft, dry cloth. Do not use solvents or chemicals. Avoid dampness on all electrical components.

WWW.HINEON.COM

For indoor use only. Avoid direct contact with water.

DC 12V

The light is designed to work only with the indicated voltage. Different items require different working voltages.

This electric sign is built in compliance with UL requirements and standards.

This luminaire cannot be disposed of with regular domestic waste in a standard rubbish can. You have to bring it to a staging area for electrical waste.

INSTALLATION

1

Prepare your indoor open neon sign and installation set (Open Indoor Sign, Nail Anchors, Screws, Mini RF Remote Receiver, and 12V Power Adaptor)

2



Find the location to install your open sign. Mark the holes from the backing and drill a hole mark with a ¼" (6mm) drill bit

3

Add the drywall anchors in the holes with a hammer.

4

With your screwdriver, screw in to the hole on the backing and the nail anchors

5

Now connect the wires, plug it in, and light it up.

*HANGING INSTALLATION

6

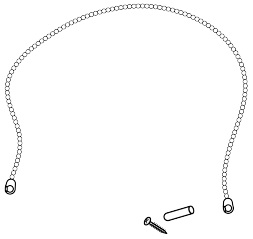

Prepare your Hanging Chain Set (Nail Anchor, Nail, and Hanging Chain)

7

Mark a spot for your hanging chain and drill a hole mark with a ¼" (6mm) drill bit. Tap the drywall anchor in the hole with a hammer.

8

Screw the nail into the drywall anchor. Don't fully screw so there's space left to hang the chain.

9

Put the hanging chain clamps in the holes of the open sign backing.

10

Now connect the wires, hang it, plug it in, and light it up

NEED MORE ASSISTANCE?

Call: +1 833 768 7999

Email : hello@hineon.com

Visit: www.hineon.com/faq/

SCAN TO VISIT FAQ PAGE